

### Features

- Fixture-mount design.
- Includes a 30-year hybrid energy cell.

### Material

- Brass construction.

### Technology

- Electronic infrared sensor with TriPoint™ technology for accurate activation.
- Slow-closing piston technology.

### Installation

- Intended for toilet installations with 1-1/2" spud coupling connection.

### Optional Accessories

GP1118986 Flushometer Extension Kit  
GP1132369 24" Tailpiece  
K-10313 12" Supply Line Sleeve



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
CSA B125.3  
CSA B64  
ASSE 1037  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes


*Color tiles intended for reference only.*

#### Color Code Description



CP Polished Chrome

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

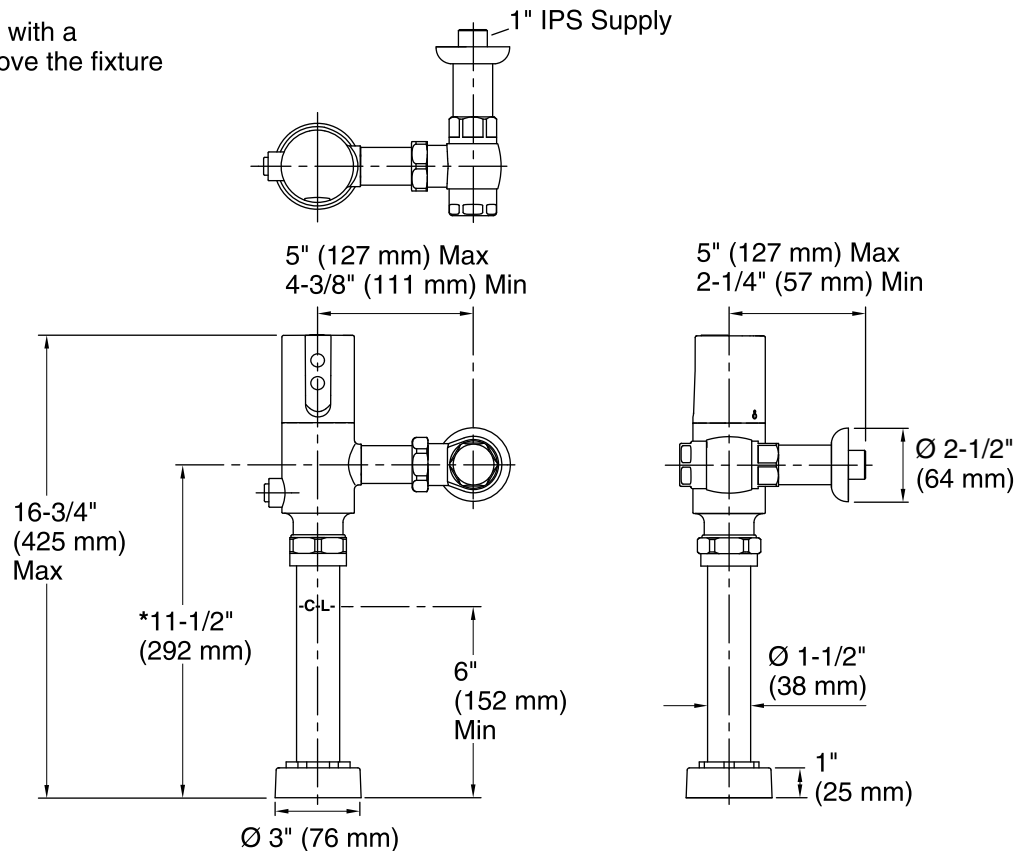

## Technical Information

All product dimensions are nominal.

## Pressure and Supply Requirements

Fixture flow rate min: 25 gpm (94.6 lpm)

Fixture pressure max 80 psi (551.6 kPa)

```
(static):
```

Power source: 3.6V Size C (Hybrid Energy Cell), included

## Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.