



Levity® | K-706015-L

56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Crystal Clear glass

Features

- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed
- Cushioned center guide provides smooth, quiet sliding action
- Gently curved towel bars, inside and outside, provide integrated storage on the door
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Tempered glass ensures enhanced safety and durability



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|-----|-------------------------------|
|  | SH | Bright Silver |
|  | BL | Matte Black |
|  | MX | Matte Nickel |
|  | ABV | Anodized Brushed Bronze |
|  | 2MB | Vibrant Brushed Moderne Brass |
|  | ABZ | Anodized Dark Bronze |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

6-10-2026 21:3 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ANSI Z97.1 (Tempered Glass)
CAN/CGSB-12.1
CPSC 16CFR 1201

Technical Information

All product dimensions are nominal.

Base-To-Wall Radius - Maximum:	1/2" (13 mm)
Shower Ledge Minimum Flat:	2-1/2" (64 mm)
Shower Wall Minimum Flat:	3-1/2" (89 mm)
Weight:	98.91 lbs (44.9 kg)

Material

- Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass
-


Warranty

See website for detailed warranty information.

KOHLER® Bath and Shower Doors Ten-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-10-2026 21:3 - US-CA

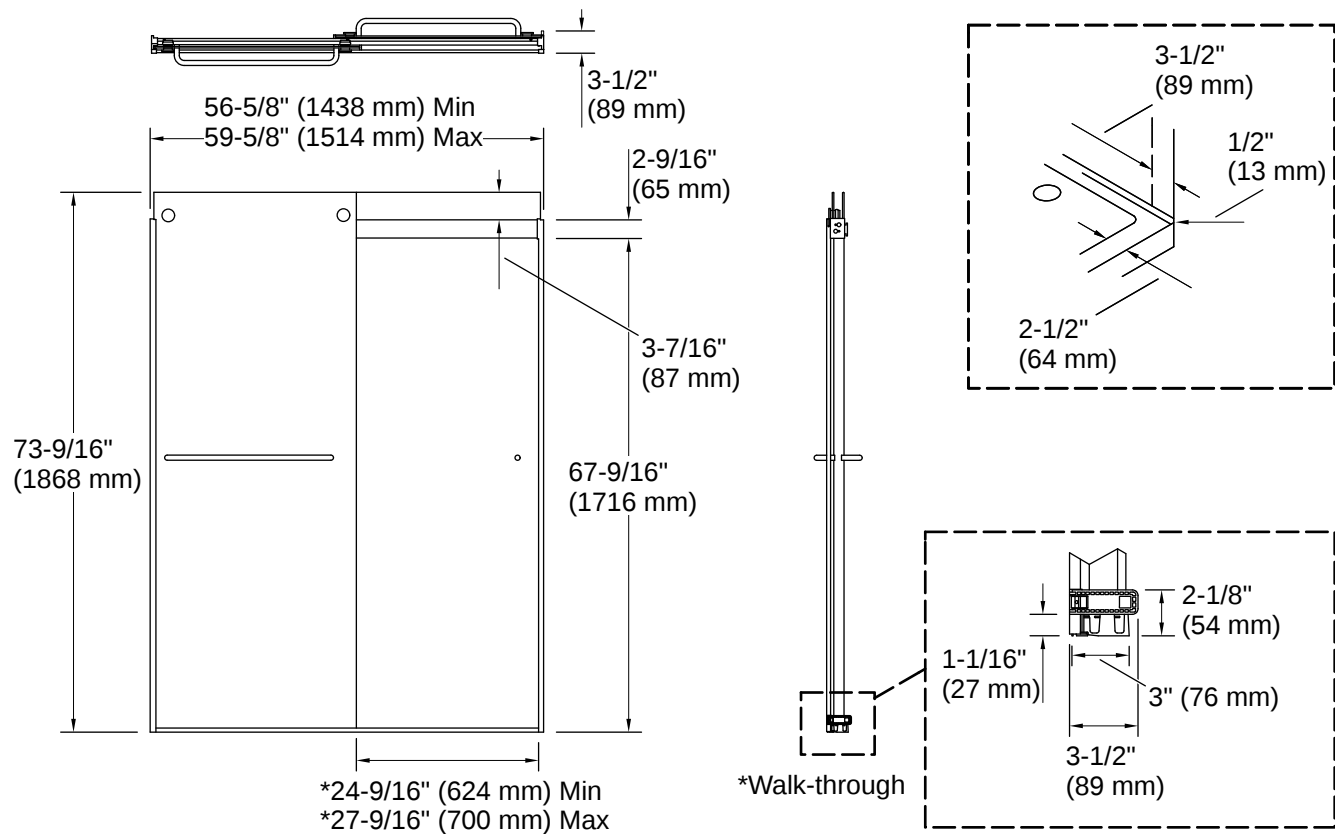

Installation

- Sliding shower door
- Not for use in hospitality

Installation Notes

Install this product according to the installation instructions.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes. The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-10-2026 21:3 - US-CA

THE BOLD LOOK
OF **KOHLER**®