



MODA™ WASHING MACHINE OUTLET BOX (SINGLE)

Job Name:	Item #:
Location:	
Engineer:	Contractor:
PO#:	Tag:
Representative:	

SPECIFICATION

Oatey MODA™ washing machine outlet boxes shall be used in residential or commercial applications requiring supply valves and a waste drain recessed in the wall. The MODA™ washing machine assembly contains two supply valves and a drain connection, with inter-locking wing flanges on each side. Box shall be manufactured of PVC, allowing solvent welded joints to be prepared in accordance with ASTM D2855 for PVC drainage systems (without the use of specialty cements). The wing flanges shall allow installation on a single stud, or between two studs in combination with the included side brackets. No additional components shall be required for a between stud installation. Valves shall be a two-piece design, permitting field replacement, and shall be secured with a stainless steel retention clip. Valves are available with or without water hammer arrestors and shall be installed in an inverted configuration. The assembly shall include a knockout cap for DWV testing.

MATERIALS

Outlet Box & Brackets	PVC
Valve Body	Forged Brass C37700
Valve Retention Clip	Stainless Steel
Valve O-Rings	NSF Approved EPDM (2)

PERFORMANCE SPECIFICATIONS

Temperature Rating (Valve)	250° F / 121° C
Max Testing Pressure (Valve)	100 psi (Air) / 250 psi (Water)

LISTINGS & CODE APPROVALS

Valves	ASME A112.18.1 / CSA B125.1
Water Hammer Arrestors	ASSE 1010
Boxes	IAPMO-Listed, PS-54



DIMENSIONS

[A]: Box Width	8.00"	[E]: Bracket Length	8.00"
[B]: Box Depth	3.38"	[F]: Faceplate Width	6.00"
[C]: Box Height	4.85"	[G]: Faceplate Height	6.45"
[D]: Bracket Width	4.00"	[H]: Faceplate Depth	1.25"

PRODUCT SELECTOR

No Hammer Arrestors			Hammer Arrestors		
<input type="checkbox"/>	37540	WMOB1, Copper, NoHam, Std Pk	<input type="checkbox"/>	37550	WMOB1, Copper, Ham, Std Pk
<input type="checkbox"/>	37541	WMOB1, F1807-Brass, NoHam, Std Pk	<input type="checkbox"/>	37551	WMOB1, F1807-Brass, Ham, Std Pk
<input type="checkbox"/>	37542	WMOB1, F2159-PPSU, NoHam, Std Pk	<input type="checkbox"/>	37552	WMOB1, F2159-PPSU, Ham, Std Pk
<input type="checkbox"/>	37543	WMOB1, F1960-Brass, NoHam, Std Pk	<input type="checkbox"/>	37553	WMOB1, F1960-Brass, Ham, Std Pk
<input type="checkbox"/>	37544	WMOB1, F1960-PPSU, NoHam, Std Pk	<input type="checkbox"/>	37554	WMOB1, F1960-PPSU, Ham, Std Pk
<input type="checkbox"/>	37545	WMOB1, CPVC, NoHam, Std Pk	<input type="checkbox"/>	37555	WMOB1, CPVC, Ham, Std Pk
<input type="checkbox"/>	37546	WMOB1, Push Cnc, NoHam, Std Pk	<input type="checkbox"/>	37556	WMOB1, Push Cnc, Ham, Std Pk

- All products sold in case packs of 12.



Accessory Components Included:



Side Brackets (2)



Faceplate




Sticker Cover
(For Debris Protection)



Test Plug



LocPin™
Stainless Steel Retention Clip

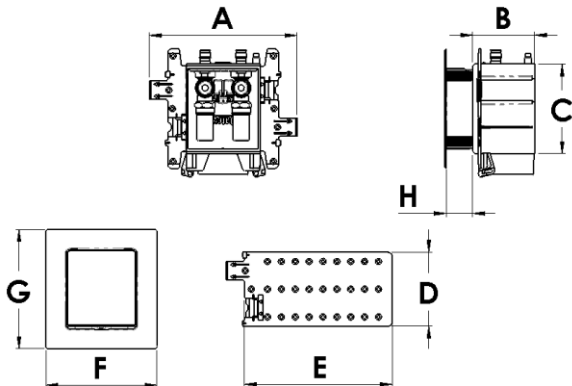

Access BIM/Revit content through www.oatey.com