



OATEY QUIET PIPES® HAMMER ARRESTORS SIZE AA

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

SPECIFICATIONS

Oatey Quiet Pipes Hammer Arrestors shall be installed in any small diameter pipe supply application which could experience water hammer due to quick closing valves or faucets. Arrestor chambers shall be specifically sized to accommodate and dissipate energy generated by such valves and faucets. Arrestors shall be effective when installed at any angle. Arrestor shall be lead-free, made of copper and include a polypropylene piston with two NBR o-rings. Arrestors shall be ANSI/ASSE1010-2004, listed and approved for installation with no access panel required. Compatible with press fittings or push fittings.

FEATURES & MATERIALS

Arrestor Body	Copper (Type L)
Piston	Polypropylene with two NBR O-rings
Piston Lubrication	Dow Corning Molykote 111
Fittings Available	Male Sweat/Press, Female CPVC, Male CPVC, F1807 PEX & F1960 PEX (no lead brass C46400)

PERFORMANCE SPECIFICATIONS

Temperature Range	33° - 180° F
Max Working Pressure	0-60 PSI


LISTINGS & CODE APPROVALS

ANSI/ASSE1010-2004
cUPC
PDI WH-201-2017



DIMENSIONS

Arrestor Size:	AA	AA	AA	AA	AA	AA	AA	AA
Product #:	34498	34458	34459	34460	34461	39177	38600	34463
Arrestor Body Diameter [A]:	0.875"	0.875"	0.875"	0.875"	0.875"	0.87"	0.87"	0.875"
Overall Height [B]:	5.57"	2.95"	3.63"	3.83"	3.85"	2.75"	4.38"	5.36"
Fitting Type [C]:	Male Sweat/Press	Female CPVC	Male CPVC	F1960 PEX	F1807 PEX	MIP	Branch	Male Sweat/Press
Fitting Size [C]:	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	3/4"	3/4"

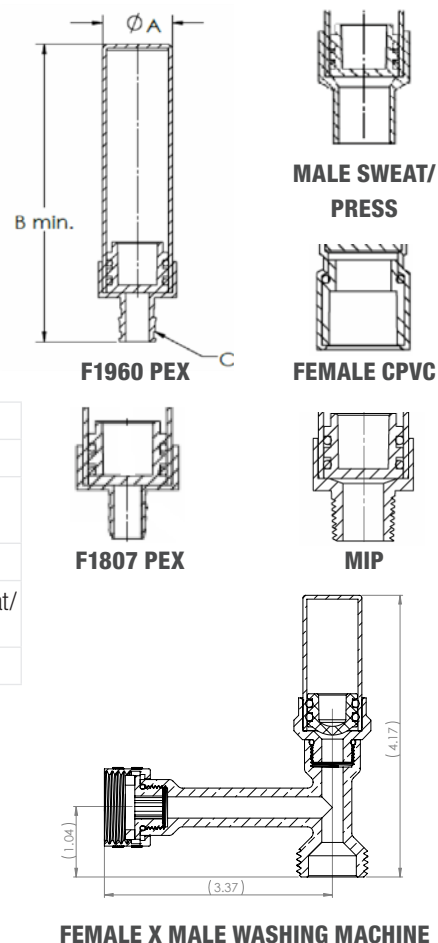

*Limited Lifetime Warranty – See Oatey.com/warranty for details.

Access BIM/Revit content through www.Oatey.com



**OATEY QUIET PIPES®
HAMMER ARRESTORS
SIZE AA**

Job Name	_____	Item #	_____
Location	_____		
Engineer	_____	Contractor	_____
PO #	_____	Tag	_____
Representative	_____		

PRODUCT SELECTOR

QUIET PIPES® HAMMER ARRESTORS SIZE AA			
✓	Product Number	Description	CTN. QTY.
	34498	AA, 1/2" Male Sweat/Press	12
	34458	AA, 1/2" Female CPVC	30
	34459	AA, 1/2" Male CPVC	30
	34460	AA, 1/2" F1960 PEX	30
	34461	AA, 1/2" F1807 PEX	30
	39177	AA, 1/2" MIP	6
	38600	AA, 3/4" x 3/4" Washing Machine	6
	34463	AA, 3/4" Male Sweat/Press	30