For Residential and Commercial Applications				
Job Name		Engineer / Architect		
Job Location		Wholesaler		
Submittal Date		Contractor		

## KTBRPX44 1/4 Turn Straight Ball Stop – Barbed PEX x Barbed PEX

*Use:* For use in potable water distribution systems in accessible locations only.

#### **Design Features:**


- Machined brass ball is specially engineered and mated with fluorocarbon seats to provide smooth operation without freeze ups even after long periods of non-use
- Two high-performance o-rings withstand high temperatures and corrosion from harsh water environments
- Machined, one-piece brass body provides strength, durability, and long-lasting performance
- Brass stem is assembled from the inside out with two o-rings to ensure safe, reliable performance
- Plated stem provides corrosion resistance and prevents o-ring damage after long periods of non-use
- Exclusive, metal handle is designed for durability, corrosion resistance, & a sleek appearance
- Easy-to-remove handle with screw attachment helps protect against accidental stop operation during rough-ins
- 100% Leak tested
- **✓** No Lead
- PEX end designed to ASTM F1807
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807, and/or F2098 connection methods

### **Operating Specifications:**


*Temperature:* 40°-180° F

**Pressure:** 125 PSI maximum

STOP MATERIAL SPECIFICATIONS				
Body	Brass or brass, chrome plated			
Stem	Brass, plated			
Seat	Fluorocarbon			
Ball	Brass, plated			
O-ring	Rubber			
Handle	Zinc die cast or Zinc die cast, chrome plated			
Handle Screw	Zinc-plated steel			
Pex Outlet Fitting	Brass or brass, chrome plated			








# KTBRPX44 1/4 Turn Straight Ball Stop – Barbed PEX x Barbed PEX

1/2" nom crimp barb x 1/2" nom barb, rough brass, bulk

Part Listing:				
	KTBRPX44X C	1/2" nom crimp barb x 1/2" nom barb, chrome plated		
	KTBRPX44X CB	1/2" nom crimp barb x $1/2$ " nom barb, chrome plated, bulk		
	KTBRPX44X R	1/2" nom crimp barb x 1/2" nom barb, rough brass		

PART DIMENSIONS (Inches)				
Model	DIM. A	DIM. B		
KTBRPX44X	1.14	2.19		

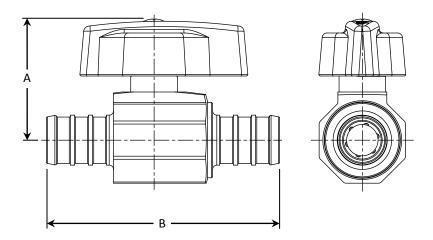

### **Listings & Certifications:**

KTBRPX44X RB

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- No-Lead product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01









