

## Windham™

Two-piece elongated toilet, 1.28 gpf 402322-WTL

#### **Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Color-matched left-hand white trip lever included
- 2-1/8" (54 mm) fully glazed trapway
- Combination consists of 403317 bowl and 402362-WTL tank
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

#### Installation

- Three-bolt quick-connect installation
- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

#### **Recommended Products/Accessories**

K-4774 Brevia™ Quick-Release™ elongated toilet seat

#### **Included Components**

402362-WTL Toilet tank, 1.28 gpf 403317 Elongated chair height toilet bowl





**CSA B651** ADA

**OBC** 

#### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 **CSA B651** OBC

# STERLING® Toilet Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.


**Color Code Description** 

White



# Windham™

Two-piece elongated toilet, 1.28 gpf 402322-WTL

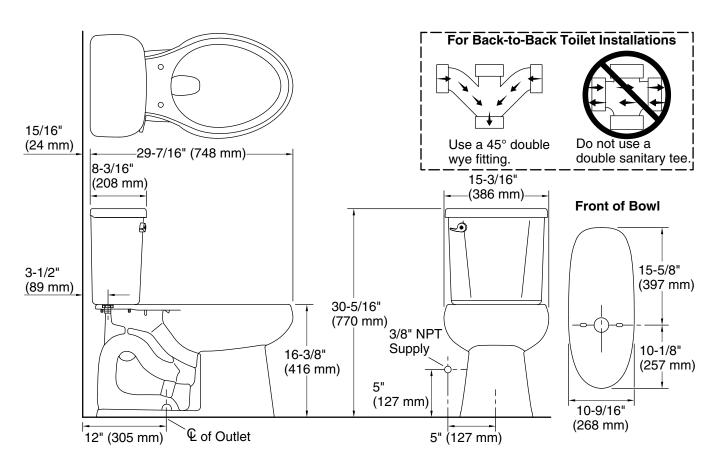

## **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Flush type: ProForce Plus
Trap passageway: 2-1/8" (54 mm)
Rim to water 6-1/4" (159 mm)

surface:

## **Fixture Supply Requirements**

Min static pressure: 20 psi (137.9 kPa)
Max static pressure: 80 psi (551.6 kPa)
Min flowing 15 psi (103.4 kPa)

pressure:

Min flow rate: 1 gpm (3.8 lpm)

#### **Notes**

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.