# Cast Iron Nexus Bathtub

### **FEATURES**

- 66-15/16" x 29-1/2" x 21-1/8"
- Enameled cast iron construction
- Slip-resistant surface
- Acrylic skirt

# **COLORS/FINISHES**

- Standard Shell Color #01 Cotton
- Standard Drain Finish CP Polished Chrome BN Brushed Nickel
- Optional See price book for additional colors

### CODES/STANDARDS

- Meets or exceeds ASME A112.19.1/CSA B45.2
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



# PRODUCT SPECIFICATION

The cast-iron bath shall be 66-15/16" in length, 29-1/2" in width and 21-1/8" in height. Bath shall be free standing with center drain. Bath shall have a slip-resistant surface and acrylic skirt. Bath shall be TOTO Model FBF794S\_\_\_\_.

# Cast Iron Nexus Bathtub

### **SPECIFICATIONS**

• Size 66-15/16"L x 29-1/2"W x

21-1/8"

• Depth 16-15/16"

Warranty
Material
Lifetime limited warranty
Enameled cast iron

Acryllic skirt 390 lbs.

Shipping WeightShipping Dimensions

• Shipping Dimensions 70-1/2"L x 33-1/16"W x


26-9/16"H

• Gallons 48 to overflow

### **INSTALLATION NOTES**

It is recommended to install this bathtub with access to the floor below. Please check local codes. The feet on FBF794S#01D are adjustable to +/- 5/16" (8 mm). The supplied straight drain bend can be replaced with a tee to allow near horizontal drainage. Brass tee sold separately.

Floor support under bath must provide a minimum of 80 lbs/square foot (391 kg/square meter) loading.

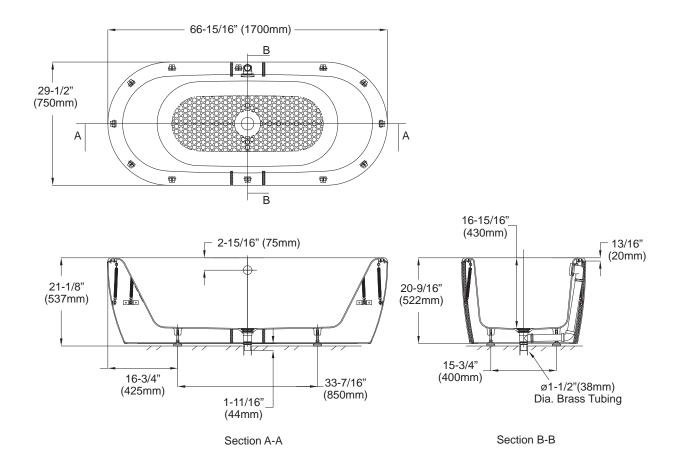



These dimensions and specifications are subject to change without notice