TOTO®

MW4542044CUFG

Drake[®] II 1G[®] / Washlet[®] + C200 Two-Piece Toilet - 1.0 GPF

FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency Tornado Flush® (1.0GPF/3.8LPF)
- CeFiONtect® glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- Chrome trip lever
- 12" Rough-in, less supply
- See Spec sheet SW2044T20 for Washlet features

MODELS

- C454CUFGT20 Bowl with CeFiONtect glaze
- ST453U Tank and cover only (1.0GPF/3.8LPF)
- ST453UR Tank and cover only, right hand trip lever

REQUIRED WASHLET CONNECT+

• SW2044T20 Washlet®+ C200 Fits TOTO WASHLET+ toilet bowl models only

COLORS/FINISHES

Standard #01 Cotton

PRODUCT SPECIFICATION

The two-piece ultra high-efficiency Tornado Flush toilet shall be 1.0GPF/3.8LPF.

Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever.

Toilet shall be TOTO Model C454CUFGT20#01.

See TOTO Specification sheet **SW2044T20** for details on required Washlet.



CeFiONtect

wasнье́т_∗+



Tornado Flush

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts , City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)









Drake® II 1G® / Washlet®+ C200 Two-Piece Toilet - 1.0 GPF

SPECIFICATIONS

1.0 GPF/3.8LPF Water Use Flush System Tornado Flush® Min. Water Pressure 8 psi (static) Water Surface 6-7/8" x 8-7/8" Trap Diameter 2-1/8" Rough-in 12"

Trap Seal 2-1/8"

Warranty One Year Limited Warranty

Material Vitreous china

Shipping Weight C454CUFGT20 57.3lbs. 28.0lbs. ST453U(R)

SW2044T20 16.0lbs.

Shipping Dimensions C454CUFGT20

29" L X 14-3/4" W1 X 11-1/2" W2 X 16-1/4" H

ST453U(R)

18" L X 9" W X 16" H SW2044T20


23 1/2"X 19" X 9"

See Spec sheet **SW2044T20** for Washlet details

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.




Ilnstall this product according to the installation guide.

Will comply with ADA when installed per Section 604 Water Closetsand Toilet Compartments of the ADA 2010 Accessible Design Standard with seat height between 17" to 19", trip lever on approach side and flush actuation force of less than 5lbs.

Will comply with CSA B651 when installed per Clause 6.2.6 Toilets.

of the CSA 2012 Accessible Design Standard with seat height between 17" to 19", trip lever on approach

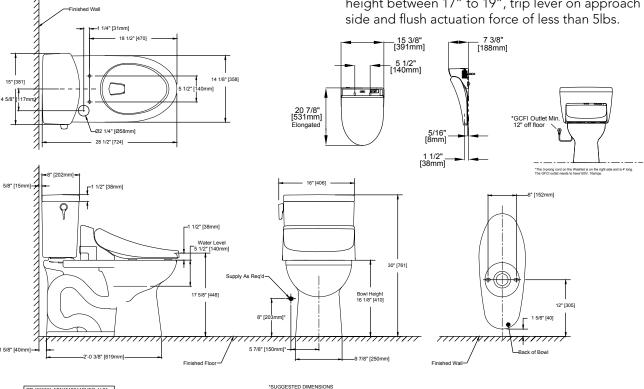



RD-XXXXX, MW4542044CUFG, V.01

These dimensions and specifications are subject to change without notice