

# MS854114SL

## Ultramax® One Piece Toilet, ADA Height, 1.6 GPF



MS854114SL - Ultramax® ADA Height Toilet with SoftClose® Seat



G-Max® Technology: A Quiet, powerful commercial grade flushing performance



Complete with SoftClose® seat, or upgrade to a Washlet®.



Fast Flush: New, wider 3" flush valve is 125% larger than conventional 2" flush valves.

- Sleek high profile one piece design
- G-Max® Technology
- Powerful, quiet flush every time
- ADA Height for maximum comfort
- Wide, 2-1/8" computer designed trapway
- Large water surface

ADA Compliant, high profile one piece toilet. Low consumption (6Lpf/1.6Gpf) siphon jet flushing action.

Tank cover, fittings, polished chrome trip lever, and SoftClose<sup>®</sup> seat included.

## ■ MS854114SL

Elongated ADA compliant toilet with SoftClose® seat

### **□** SS114

SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

Colors:

Standard #01 Cotton, #11 Colonial White #12 Sedona Beige, #03 Bone

Trip Lever:

Standard #CP Chrome Plated Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



For installation condition with approach from the left hand side.

## MS854114SL

## Ultramax® One Piece Toilet, ADA Height, 1.6 GPF

#### PERFORMANCE

The TOTO® G-Max® system offers outstanding commercial grade performance. The TOTO® low consumption one piece toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

#### SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf Flush System: Gravity Feed

(G-Max® System)

Min. Water Pressure:

8 psi (Static)

Water Surface: 10-5/16" x 8-1/4"

Trap Dia.: 2-1/8" 12" Rough-in: 2-5/8" Trap Seal:

Warranty: One Year Limited Warranty

Material: Vitreous China

Shipping Weight: MS854114L

99 lbs.

Shipping Dimensions:

MS854114L

31-3/8"L x 19-5/16"W

x 28-15/16"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing / Approvals: C-UPC, City of Los Angeles, State of Massachusetts, and others.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from the left hand side.

These dimensions and specifications are subject to change without notice.

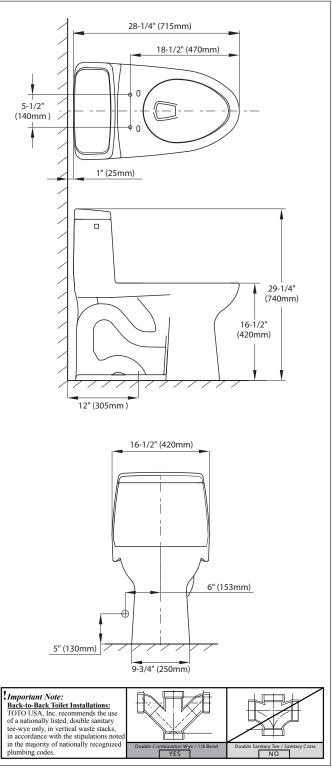

MS854114SL - Ultramax® ADA Height Toilet with SoftClose® Seat

