


- I. General Description
 - a. A low height shower door that eases shower entry and exit, improves privacy and warmth for bather, permits caregiver access, and protects caregiver from overspray.
2. Item Codes and Descriptions
 - a. 91179N . . . Alcove caregiver door
3. Physical Characteristics
 - a. Door height: 29½"
 - b. Door width: fits alcoves 50¾" to 51¾" wide with supplied compensators
 - c. Two compensators are supplied with each caregiver door model
 - d. Up to 4" greater width may be achieved with the use of extra-wide compensators
 - i. 2" additional width with each extra-wide compensator
 - ii. each extra-wide compensator replaces an original compensators
 - iii. installer may use any combination of original and extra-wide compensators
 - e. Compensators mount to the walls, and doors are secured into the compensators
 - b. Aluminum frames with PET plastic panels
 - c. PET panels are embossed with a surface texture
 - d. PET plastic panels will not shatter
 - e. A magnetic strip is installed at the unhinged edge of each door
 - f. Each door segment has an elastomeric gasket that contacts the floor
 - g. Hinges and caps are made of nylon 6
 - h. Bi-fold doors swing 180° in and out, and fold against each other
 - i. Handles pivot to unlock or lock adjacent door segments
 - j. Color
 - i. frames: white
 - ii. corners: gray
 - iii. compensators: white
 - iv. compensator caps: gray
 - v. handles: white
 - vi. elastomeric gaskets: gray
 - k. Fasteners not included
4. Performance Characteristics
 - a. For wet room installations only
 - b. No rust construction
 - c. Door swing allows generous access
 - d. Pattern on PET panels provides privacy
 - e. Magnetic strips and gaskets increase water retention
 - f. Handles are designed to give way to the force of a fall against the doors, thus limiting injury to the user and damage to the doors (replacement handles are available)
 - l. Compensators allow for adjustments in overall fit, sizing the doors for width, and ensuring a plumb installation
5. Other Information
 - a. 5 year limited warranty when installed in commercial settings
 - b. 10 year limited warranty when installed in residential settings
 - c. See AKW warranty for details

Specification & Submittal Form 91179N Caregiver Door

ARC, Inc.
1-877-319-6521
info@arcfirst.net

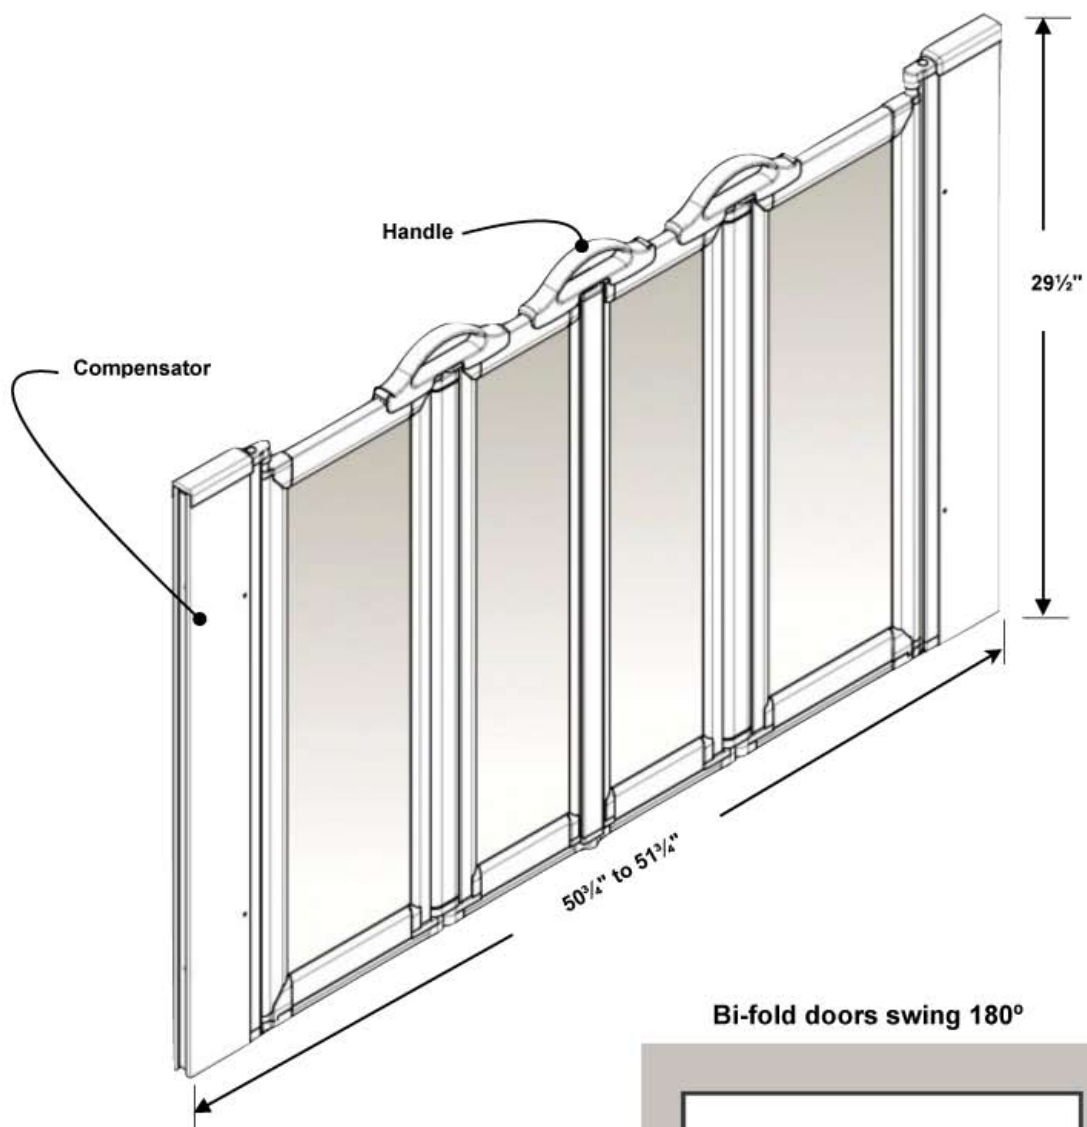

Bi-fold doors swing 180°

