

1. General Description

- a. Steel, U-shaped support hinged to a mounting bracket
- b. Epoxy-resin coated steel or bright stainless steel
- c. Adjustable leg, fixed-length leg, or no-leg models

2. Item Codes and Descriptions

- a. 01810 . . . Fold-up support — no leg
- b. 01820 . . . Fold-up support — fixed-length leg
- c. 01830 . . . Fold-up support — adjustable-length leg
- d. 01830SS . . . Fold-up support in stainless steel — adjustable-length leg

3. Physical Characteristics


- a. Epoxy-resin coated models made of steel with rust inhibitor treatment
- b. Support bar diameter: 1 1/4"
- c. Epoxy-resin coated model colors: white and blue
- d. Adjustable leg adjusts in 3/4" increments and offers 1" of fine foot adjustment
- e. Epoxy-resin coated models supplied with optional toilet roll holder
- f. Stainless steel model includes an integrated toilet roll holder
- g. Stainless steel model available in adjustable leg only
- h. Installer must fasten mounting bracket to solid, structural blocking
- e. Installation hardware not included; 1/4" stainless steel fasteners recommended

4. Performance Characteristics

- a. Supports users entering and exiting a toilet, and eases side transfer to toilet
- b. U-shaped support offers many hand-hold and leverage positions
- c. High contrast blue models aid the vision impaired
- f. Models with legs support up to 440 pounds (when properly installed)
- d. No-leg model supports up to 220 pounds (when properly installed)
- e. Support engages a clamp to remain in folded, upright position
- f. Height to top of support on fixed-leg model: 27"
- g. Range of height to top of support on adjustable-leg models: 26 1/2" to 34 1/4"

5. Other Information

- a. Passed ASTM B117-87 salt spray test
- b. 5 year limited warranty when installed in commercial settings
- c. 10 year limited warranty when installed in residential settings
- d. See AKW warranty for details

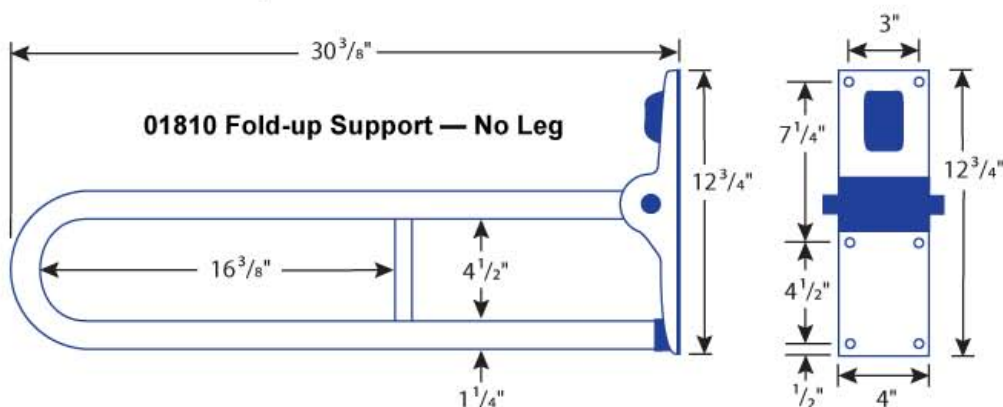

Mounting Bracket
(support removed
for clarity)

Specification & Submittal Form Fold-up Supports

ARC, Inc.
1-877-319-6521
info@arcfirst.net

